

AERIAL CABLE PLACEMENT TOOLS



MAKING CABLE PLACEMENT EASIER

With guidance from professional linemen, Jameson developed cable placement tools for fiber optic and coaxial cable installation and maintenance. Working from the ground or in the air, our tools make cable construction easier and safer.

Corner Blocks

Corner blocks evenly distribute pressure on coax or fiber cable when pulling around corners. Steel side plates with straight base act as a strut for increased strength. 60 degree model offers more versatility than standard 45 degree blocks. Steel side plates can be replaced in the field.

17" bend radius. Maximum cable diameter 1"

Nylon axle bushings provide easier swivel and longer axle life. Adjustable keeper arm holds cable in place as it is pulled through block. Aluminum rollers reduce friction, preventing potential heat build up and damage to synthetic rollers.



SINGLE ROW



DUAL ROW

QUAD ROW



3" ROLLERS FOR 1.5" CABLE

90 Degree	60 Degree	Corner Blocks All Nylon Rollers
80-591	80-161	Corner Block - Single
80-592	80-162	Corner Block - Dual
80-594	80-164	Corner Block - Quad

90 Degree	60 Degree	Corner Blocks with One Row Aluminum Rollers
80-591A	80-161-A	Corner Block - Single

	Corner Block with 3" Rubber Roller
80-691	Corner Block with 3" Rubber Rollers; Maximum cable diameter 1.5"



Pole Mount Brackets

Designed to save vertical space on crowded joint occupied poles, brackets are ideal for mounting corner blocks. Nylon strap and ratchet make brackets easy to use and bracket is contoured to fit pole for maximum stability. Ratchet strap will not damage existing cables and weighs less than chain straps. Can be adjusted to work from right or left hand side for convenient operation.



70-101

Use With Single Row Corner Block



70-102

Use With Dual Row Corner Block



70-104

Use With Quad Row Corner Block

CABLE BLOCKS



NEW IMPROVED

Easy Rider™ Overlash Blocks

Economical and lightweight, yet the high strength steel frame maintains cable alignment.

Easily snaps over a strand and cable package up to 2.25" in diameter. The 1.0" width provides convenient stacking when pushed by lasher.

Non-binding roller axle allows rollers to “ride easily” and rotate smoothly.

- Supports fiber optic cable prior to lashing
- Use with cable up to 1" in diameter
- Welded steel frames are zinc-plated for corrosion resistance
- Quickly clips over strand
- Tall Upper frame prevents lasher from riding over the top
- Durable nylon or aluminum rollers roll freely and withstand abuse



90-400
Easy Rider® with
Nylon Roller

90-400A
Easy Rider™ with
Aluminum Roller

PART NUMBER	CABLE BLOCKS
90-400	Easy Rider® Overlash Block with 1" Nylon Roller
90-400-A	Easy Rider® Overlash Block with 1" Aluminum Roller


90-100	Versa™ Block with 3" Rubber Roller
90-100-A	Versa™ Block with 3" Aluminum Roller

Versa™ Blocks

These offer the versatility of stringing cable at midspan on new and existing overlash construction.

They are ideal for easy cable placement from aerial buckets or the ground when used with Jameson lay-up sticks and wire raising tool.

Low profile frame reduces cable damage as it passes through block and the wide keeper arm opening accommodates up to 3" cable bundles when used as overlash block.

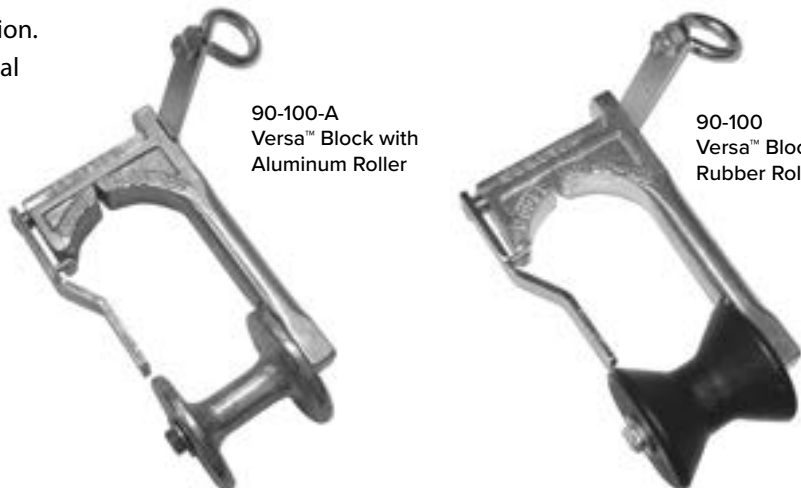

90-100-A
Versa™ Block with
Aluminum Roller

90-100
Versa™ Block with
Rubber Roller