


SKYLIFT SUPER 6000 LOW PRO BACKYARD DIGGER DEREK

WITH 40-48' SHEAVE HEIGHT



^{*}Custom Truck One Source reserves the right to change the specification of any unit at any time without prior notice. This brochure is only a statement of general specifications on the date of this publication.

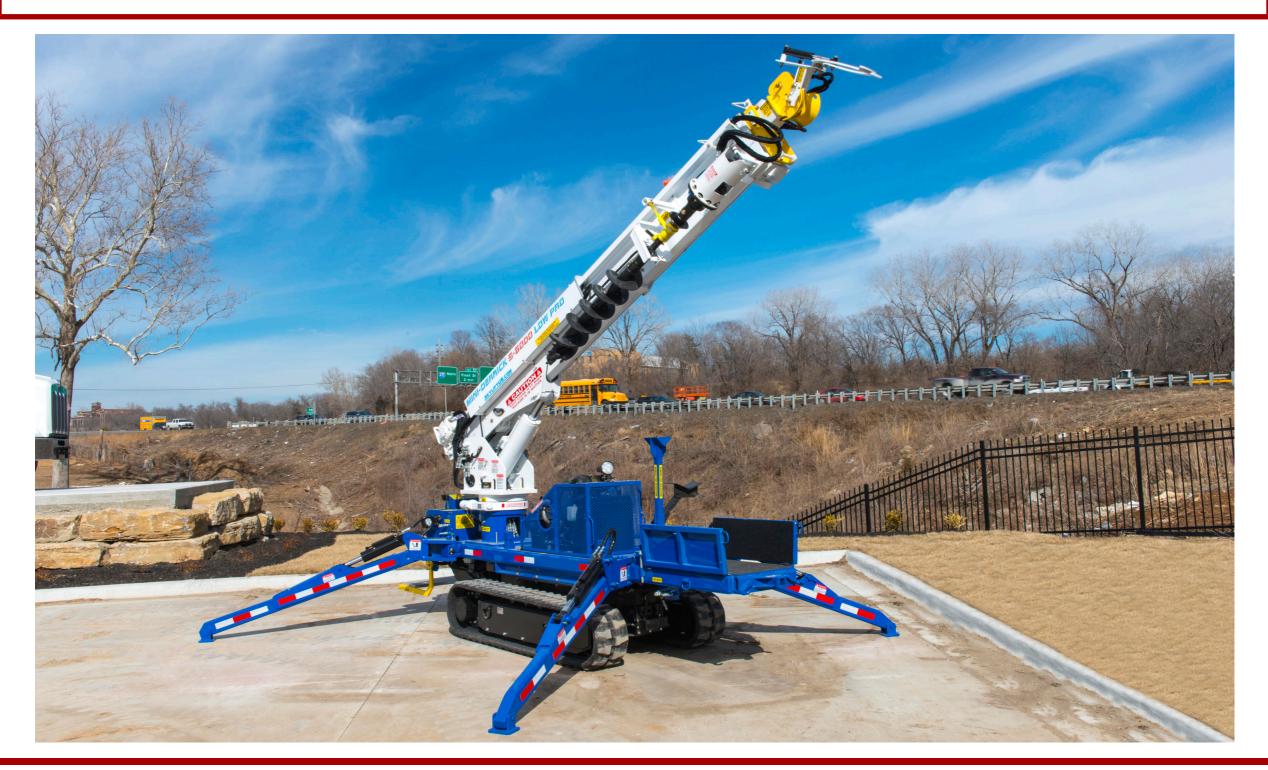

SKYLIFT SUPER 6000 LOW PRO BACKYARD DIGGER DEREK

WITH 40-48' SHEAVE HEIGHT

EQUIPMENT SPECS

BASE: HIGH STRENGTH STEEL CONSTRUCTION DRIVE: 2 SPEED PLANETARY REDUCTION

TRACKS: HYDRAULIC EXTENSION, RUBBER CONSTRUCTION
TRACK ALARMS: AUDIBLE ALARMS ON TRACKS/EXTEND-RETRACT

ENGINE: 32 HP TURBO DIESEL PUMP: 15 G.P.M. GEAR DESIGN HYDRAULIC TANK: 21 GALLON MAX. OP. PRESSURE: 2900 PSI

BOOM ASSEMBLY: 3 SECTION ALL HYDRAULIC EXTENSION INSULATION: 46 KV CATEGORY C / FIBERGLASS BOOM

WORK ZONE: NON RESTRICTED

STABILIZERS: OUTRIGGERS / HYBRID DESIGN - RADIAL TYPE

OUTRIGGER SAFETY INTERLOCKS

ROTATION: 440 DEGREE / HIGH STRENGTH BEARING CONTROLS: FULL PRESSURE / RADIO REMOTE

SHEAVE HEIGHT: 40 FT. / 48 FT.

AUGER DRIVE: 5800 LB.-FT WITH 18" DIAMETER AUGER

CAPACITY: 6000 LBS.

WINCH: PLANETARY / PLASMA ROPE

HANDLING: INTEGRATED BED 3000 LB. CAPACITY

AUXILIARY POWER: HYDRAULIC TOOL CIRCUIT AT GROUND

POLE CARRIERS: DUAL SIDED WORK LIGHTS: SET OF (2) TWO







^{*}Custom Truck One Source reserves the right to change the specification of any unit at any time without prior notice. This brochure is only a statement of general specifications on the date of this publication.