


## LOAD KING VOYAGER I MECHANICS BODY

WITH HC-7 TELESCOPIC SERVICE CRANE

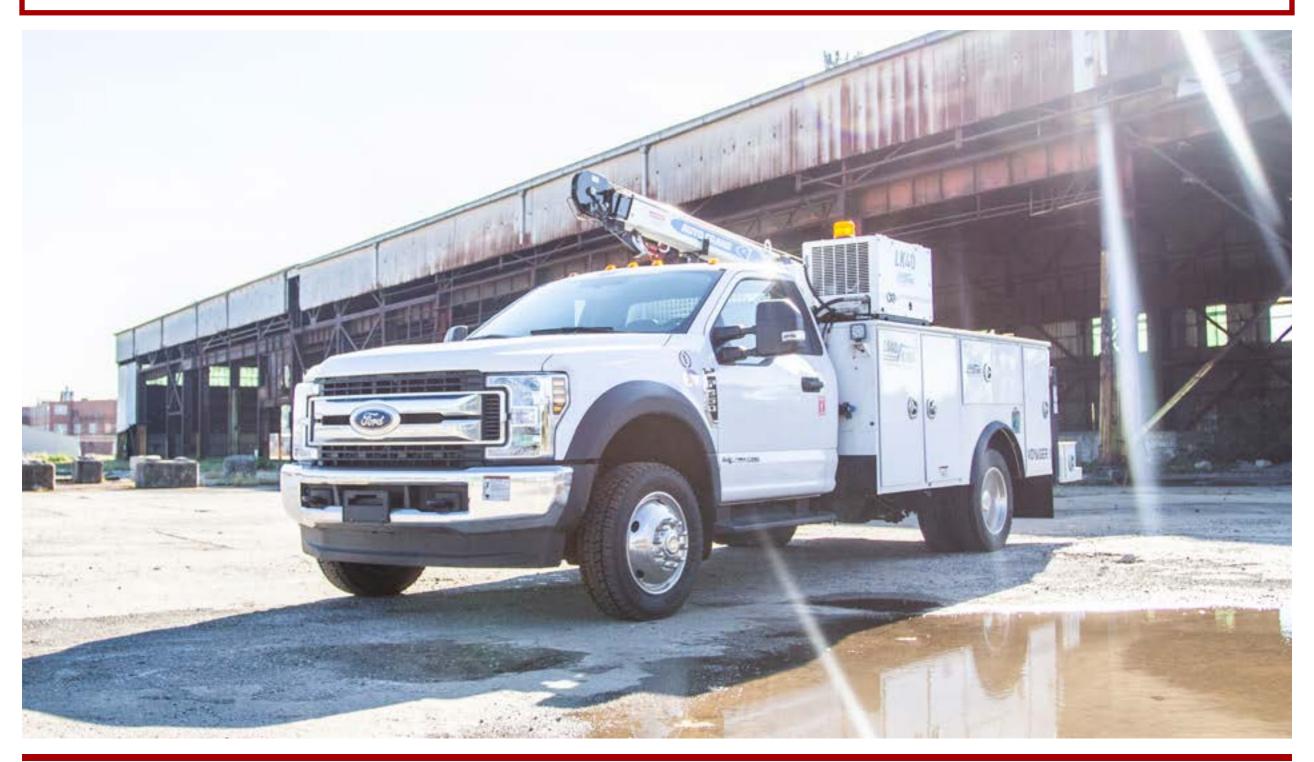

<sup>\*</sup>Custom Truck One Source reserves the right to change the specification of any unit at any time without prior notice. This brochure is only a statement of general specifications on the date of this publication.

888-925-0858 www.customtruck.com



## LOAD KING VOYAGER I MECHANICS BODY

WITH HC-7 TELESCOPIC SERVICE CRANE

## **EQUIPMENT SPECS**

11' HD GALVANNEALED STEEL CRANE BODY W/ MASTER
LOCK SYSTEM & RIGHT REAR CRANE MOUNT
25" WORKBENCH BUMPER W/ 14"THROUGH COMPARTMENT
RECESSED FOR PINTLE HOOK, "D" RINGS, AND TRAILER LIGHT RECEPTACLE
6 RECESSED CARGO TIE DOWNS
3 POINTS OF CONTACT REAR BED ACCESS
TAILGATE: 10" FOLD DOWN TAILGATE W/ SINGLE LATCH
DOORS: 14 GAUGE GALVANNEALED STEEL, 3-POINT LOCKING
ROTARY T-HANDLE STYLE LATCH STAINLESS STEEL HINGES
LED COMPARTMENT LIGHTS; (4) LED FLOOD LEFT HAND SIDE [DRIVER SIDE / STREET SIDE]
SPRAY-IN BED LINER ON LOAD BED FLOOR, LOAD BED SIDE
PACKS, LOAD BED SIDE OF TAILGATE & WORKBENCH BUMPER
LED COMPARTMENT LIGHTS; (4) LED FLOOD - LEFT HAND SIDE
[DRIVER SIDE / STREET SIDE]

## CHASSIS/CARRIER SPECS

**HC-7 TELESCOPIC SERVICE CRANE 7.000 LB. RATING 370 DEGREE ROTATION** DOUBLE ACTING CYLINDERS W/ INTEGRAL HOLDING AND/OR **COUNTERBALANCE VALVES FOUR SECTION REMOTE CONTROL VALVE** SINGLE PROPORTIONAL RADIO REMOTE CONTROL W/ RADIO **ELIMINATION CABLE BOOM MOUNTED 55 FT/MIN PLANETARY WINCH** 20' 4" BOOM LENGTH - ADJUSTABLE BOOM SUPPORT CRANE HOOK AND SNATCH BLOCK ANTI-TWO-BLOCK DEVICE HYDRAULIC OVERLOAD SHUTDOWN SYSTEM **BOOM TIP LED WORK LIGHTS** STABILIZER CONSTRUCTION: REAR POWER OUT AND DOWN **HYDRAULIC SYSTEM: 20 GALLON OIL RESERVOIR** 

LOAD KING LK40 AIR COMPRESSOR 40 CFM, UP TO 150 PSI 22.5 GAL AIR TANK (REAR, BETWEEN FRAME) 1/2" MOISTURE SEPARATOR / REGULATOR / OILER 1/2" X 50' HOSE REEL KIT W/ GUIDE







<sup>\*</sup>Custom Truck One Source reserves the right to change the specification of any unit at any time without prior notice. This brochure is only a statement of general specifications on the date of this publication.