



# LOAD KING 503-605-SS-SFF 20" SIGNATURE SERIES TRAILER

55-TON HYDRAULIC DETACHABLE GOOSENECK  
WITH STINGER BAR & FLIP AXLE CAPABILITIES



# SPECS

## DIMENSIONS:

120,000 LB CAPACITY IN 12" LOAD CONCENTRATION  
100 KSI/80 KSI MINIMUM YIELD STEEL CONSTRUCTION  
23,520 LB. ESTIMATED BASE UNIT WEIGHT  
26 FOOT DECK LENGTH, 102 INCH DECK WIDTH

## GOOSENECK:


12' 9" GOOSENECK LENGTH WITH CONNECTIONS FOR FUTURE FLIP BOX  
4 POSITION RATCHET FOR MULTIPLE RIDE HEIGHTS  
51" FIFTH WHEEL HEIGHT  
AIR ACTIVATED SELF-LOCKING PIN ON GOOSENECK, WITH POSITIVE SAFETY LOCK  
HYDRAULIC FRAME LIFT SUPPORT  
REAR FACING WORK LIGHTS ON GOOSENECK

## DECK:

PERIMETER DESIGNED WITH FULL DEPTH 14 INCH BEAMS  
2 INCH APITONG FULL WIDTH  
26 FOOT DECK LENGTH  
13 PAIRS OF CHAIN SLOT TIE-DOWNS IN OUTER UPPER FLANGES  
20 INCH LOADED DECK HEIGHT WITH 6 INCH GROUND CLEARANCE  
FLAG POCKETS FRONT OF DECK AND REAR OF TRAILER  
2 INCH APITONG (NOMINAL) IN TRACK AREA, BOLTED AT ALL BOARD ENDS  
13 PAIRS OF FULL DEPTH SWING-OUT OUTRIGGERS  
6 PAIR OF D-RINGS ON THE SIDES OF THE DECK  
30" FRONT SPRING ASSISTED FLIP RAMPS  
60" PIERCED STEEL TOOL BOX AT FRONT OF DECK

## SUBFRAME:

FRAME REINFORCING FOR MAXIMUM OF 5 AXLES  
AIR RIDE SUSPENSION WITH AUTOMATIC & MANUAL HEIGHT CONTROL  
AIR LIFT THIRD AXLE  
(3) 27,500 LB. (NOMINAL) AXLES - 5" X 3/4" WALL  
3RD TAIL LIGHT PACKAGE  
(12) 275/70R22.5 16 PR RADIAL TIRES - FIRESTONE  
(12) 8.25 X 22.5 HUB PILOTED STEEL DISC WHEELS

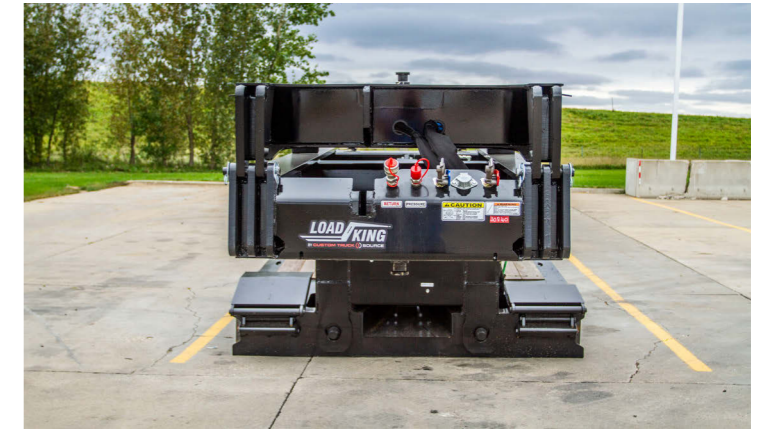

833-955-7732  
[www.loadkingmfg.com](http://www.loadkingmfg.com)

**LOAD KING**  
BY CUSTOM TRUCK (1) SOURCE

\*Load King reserves the right to change the specification of any unit at any time without prior notice. This brochure is only a statement of general specifications on the date of this publication.