
CUSTOM TRUCK ONE SOURCE™

CONDUX GULFSTREAM 400

FIBER OPTIC CABLE BLOWER

cat/class 806-6450

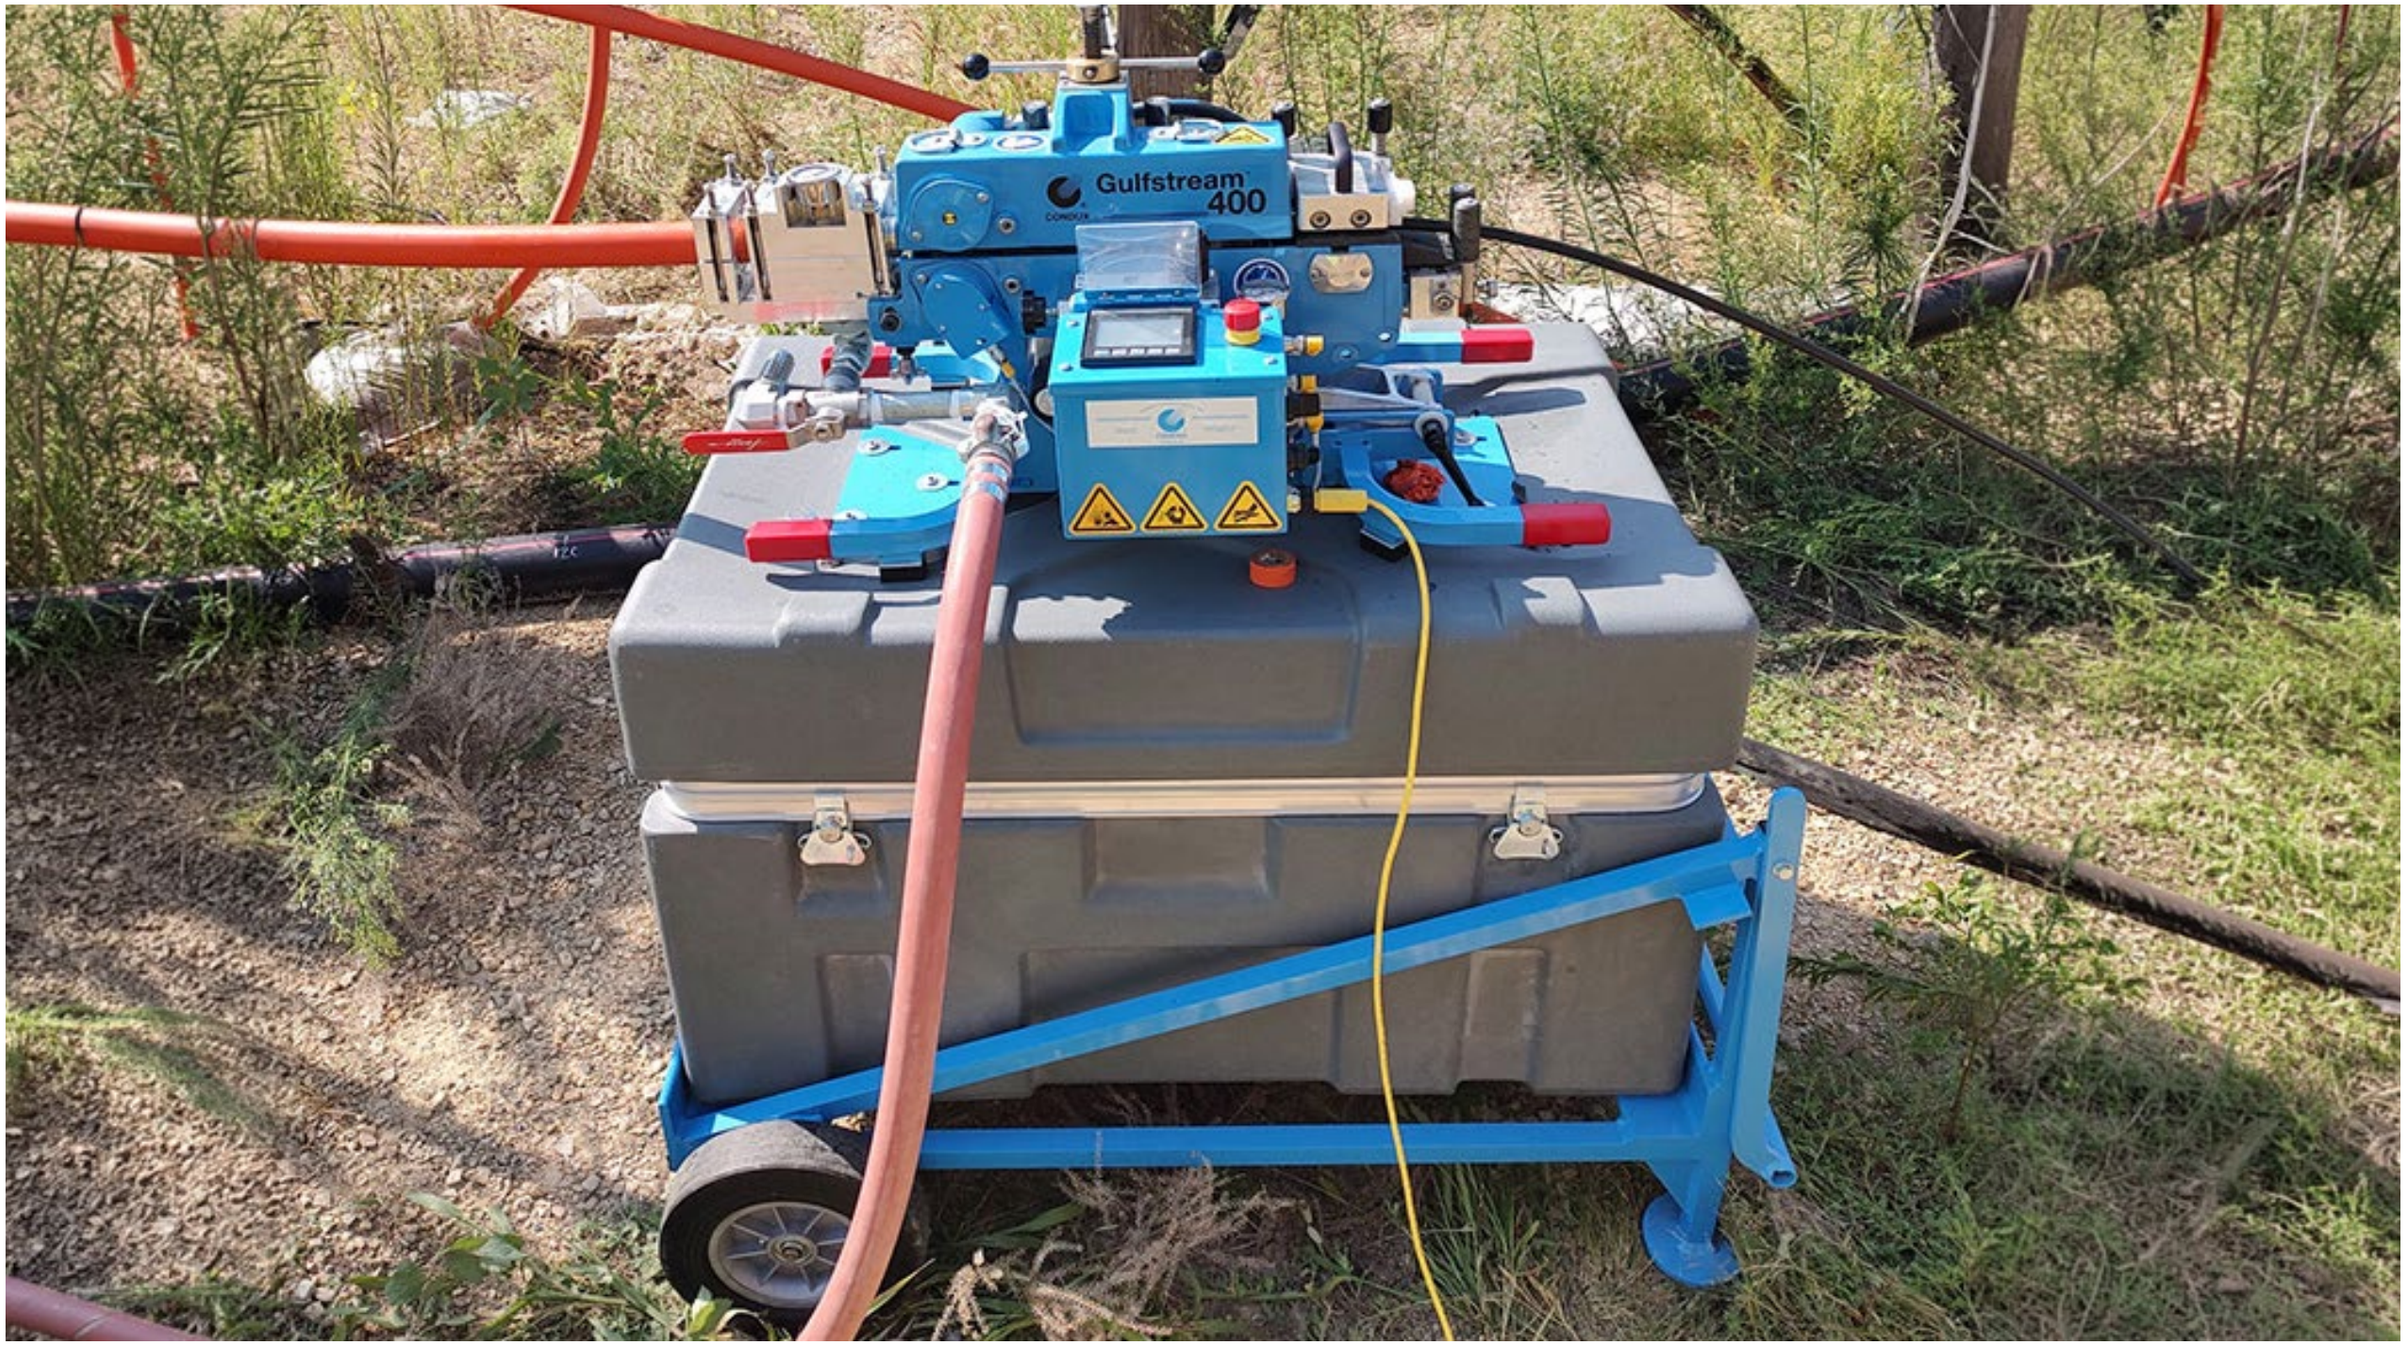

*Custom Truck One Source reserves the right to change the specification of any unit at any time without prior notice. This brochure is only a statement of general specifications on the date of this publication.

ASK ABOUT THE CUSTOMIZED AND FLEXIBLE LEASING & FINANCING SOLUTIONS AVAILABLE FROM CUSTOM TRUCK CAPITAL

888-925-0858
www.customtruck.com

CONDUX GULFSTREAM 400

FIBER OPTIC CABLE BLOWER

SPECIFICATIONS

DUCT DIMENSIONS: 0.50 IN. - 2 IN. (10MM-51MM)
FIBER DIMENSIONS: 0.23 IN. - 1.13 IN. (5.8M-28.7MM)
MAX PRESSURE: 2000 PSI
FLOW REQUIREMENT: 5 -8 GPM
SPEED: 0-300 FT/MIN FPM (0-91MPM)
MAXIMUM PUSH FORCE: 180 LBS. (800 N)
AIR PRESSURE REQUIREMENTS: 100 - 130 PSI
FLOW REQUIREMENTS: 185 - 500 CFM

ADVANTAGES

INSTALL UP TO 300 FEET OF FIBER OPTIC CABLE PER MINUTE (91 M/MIN)
HINGED AIR BLOCK AND CONDUIT CLAMPS OFFER QUICK SET UP
PNEUMATIC TRACTION CYLINDER PROVIDES CONSISTENT GRIP WITHOUT CRUSHING THE CABLE
HYDRAULIC & PNEUMATIC CONTROLS ERGONOMICALLY DESIGNED & CONVENIENTLY LOCATED
LIGHTWEIGHT & PORTABLE
CONVENIENT JOB BOX WITH WHEELS HOLDS ALL BLOWING ACCESSORIES
ELECTRONIC SLIP DETECTION
CAN PROGRAM MAX PUSH FORCE FOR CABLE PROTECTION

FEATURES

SPEED AND DISTANCE COUNTER LCD READ-OUT
HINGED AIR BLOCK AND CONDUIT CLAMPS
SMOOTH AND QUIET BELT DRIVE
EMERGENCY STOP BUTTON
CONVENIENT TILT CAPABILITY ALLOWING EASE OF POURING IN LUBRICANT
ECB PREVENTS POTENTIAL CABLE DAMAGE







*Custom Truck One Source reserves the right to change the specification of any unit at any time without prior notice. This brochure is only a statement of general specifications on the date of this publication.

ASK ABOUT THE CUSTOMIZED AND FLEXIBLE LEASING & FINANCING SOLUTIONS AVAILABLE FROM CUSTOM TRUCK CAPITAL

888-925-0858
www.customtruck.com