



SPECS

KEY FEATURES:

5-GROOVE, 42" BULLWHEELS WITH PRECISION, SOLID CAST URETHANE LININGS
TENSIONING CAPACITY, MAX: 4,000 LBS
BULLWHEEL BRAKES: 28" ALUMINUM-BRONZE (HYDRAULIC CONTROL)
GROOVE RADIUS/ DEPTH: 0.6"/ 0.6" PRECISION MACHINED

SUPPORTS CONDUCTORS RANGING FROM 4/0 AWG TO 795 KCMIL

MAX REEL DIA. X WIDTH: 84" X 52"

MAX REEL WEIGHT: 8,000 LBS

PAYOUT BRAKE: 16" ALUMINUM BRONZE (HYDRAULIC CONTROL)

REEL SHAFT DIAMETER 2-5/8"

TRAILER BRAKES: ELECTRICAL

TRAILER DIMENSIONS:

LENGTH: 20.4'


WIDTH: 8.3'

HEIGHT: 9.3' WITH OR WITHOUT 84" REEL

WEIGHT: 5,600 LBS (NOT LOADED)

GVWR 14,000 LBS.

AXLES: (2) 6,500 LB PER

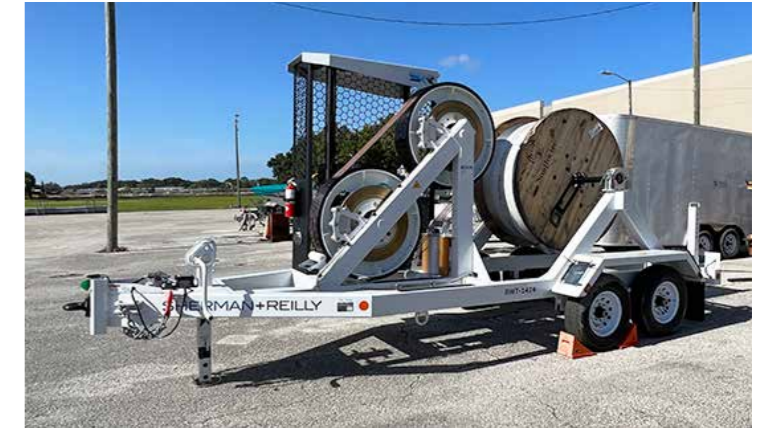

888-925-0858

www.customtruck.com

*Custom Truck One Source reserves the right to change the specification of any unit at any time without prior notice. This brochure is only a statement of general specifications on the date of this publication.

ASK ABOUT THE CUSTOMIZED AND FLEXIBLE LEASING & FINANCING SOLUTIONS AVAILABLE FROM CUSTOM TRUCK CAPITAL

